

### Thermostatic wall-mount shower mixer 9112D



**Collection:** APARU

**Finish\*:**



CP - Polished Chrome


**Main features:**



#### Features

- Weight: 6.3 kg
- Flow rate: 13 l/min
- Connection: With built-in plate
- Maximum temperature 50°C
- Elastomer retractable handles
- Cold body scald protection
- Installation: Wall-mount
- Flow rate: 13 l/min
- Hole configuration: 150 ± 15 mm
- Safety stop 38°C
- Wide surface area and integral handshower support
- Integrated non return valve

#### Technical drawing

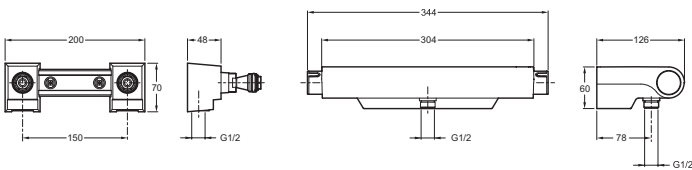

Product Specification: Thermostatic wall-mount shower mixer. 9112D. Collection: APARU. Weight: 6.3 kg. Installation: Wall-mount. Flow rate: 13 l/min. Flow rate: 13 l/min. Connection: With built-in plate. Hole configuration: 150 ± 15 mm. Maximum temperature 50°C. Safety stop 38°C. Elastomer retractable handles. Wide surface area and integral handshower support. Cold body scald protection. Integrated non return valve.