

Pivot wide-opening frameless door, with fixed side panel, size 100 cm E22T101



Collection: CONTRA

Finish*:



GA - Bright
Anodised

Main features:



Features



- Installation: Corner
- Opening : 65
- Reversible installation for left or right opening
- Chrome frame with upper cap
- Wall adjustment 15 mm. Height 200 cm
- Bracing bar 45° supplied for door
- Min/max width with single door : 96.4 - 98
- Installation: Reversible
- 6 mm clear coated glass
- Integral lift mechanism to reduce seal friction on floor
- Chrome door sill supplied for seal

Required products



- E22FT80: Fixed side panel, for pivot wide-opening frameless door, size 80 cm
- E22FT90: Fixed side panel, for pivot wide-opening frameless door, size 90 cm

Product Specification: Pivot wide-opening frameless door, with fixed side panel, size 100 cm. E22T101. Collection: CONTRA. Installation: Corner. Min/max width with single door : 96.4 - 98. Opening : 65. Installation: Reversible. Reversible installation for left or right opening. 6 mm clear coated glass. Chrome frame with upper cap. Integral lift mechanism to reduce seal friction on floor. Wall adjustment 15 mm. Height 200 cm. Chrome door sill supplied for seal. Bracing bar 45° supplied for door.



Technical drawing

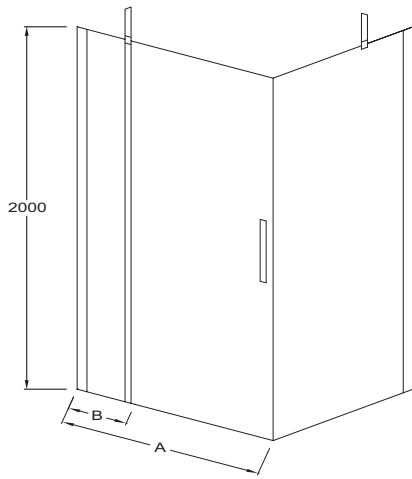

	E22T101	E22T121
Mm	1000	1200
A mini/maxi	964 / 980	1164 / 1180
B mini/maxi	246	446
C	650	650



	E22T101+E22L50	E22T121+E22L40	E22T121+E22L50
Mm	1500	1600	1700
A mini/maxi	1464 / 1500	1564 / 1600	1664 / 1700
B	246	446	446
C	650	650	650
D	500	400	500



	E22T101+E22L50	E22T121+E22L40	E22T121+E22L50
Mm	1500	1600	1700
A mini/maxi	1464 / 1500	1564 / 1600	1664 / 1700
B	246	446	446
C	650	650	650
D	500	400	500

Product Specification: Pivot wide-opening frameless door, with fixed side panel, size 100 cm. E22T101. Collection: CONTRA. Installation: Corner. Min/max width with single door : 96.4 - 98. Opening : 65. Installation: Reversible. Reversible installation for left or right opening. 6 mm clear coated glass. Chrome frame with upper cap. Integral lift mechanism to reduce seal friction on floor. Wall adjustment 15 mm. Height 200 cm. Chrome door sill supplied for seal. Bracing bar 45° supplied for door.